
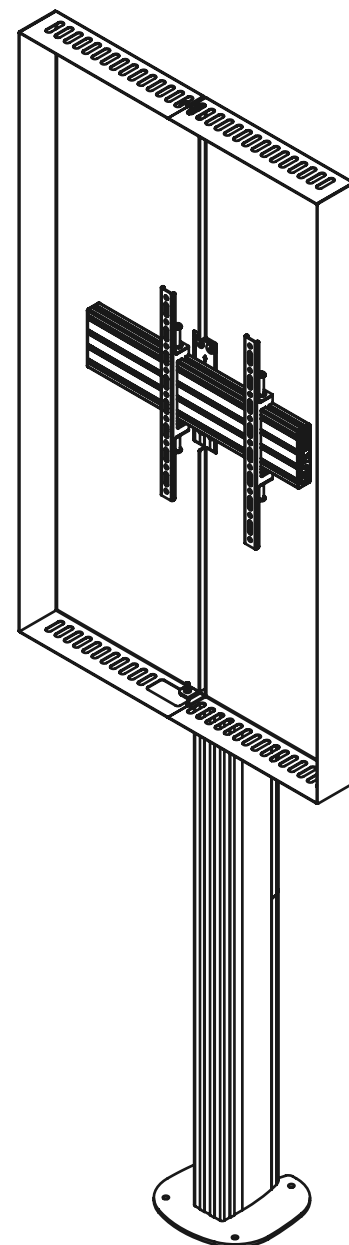


**BT7004****BOLT DOWN DIGITAL SIGNAGE MOUNT
WITH SCREEN ENCLOSURE****INSTALLATION GUIDE****SPECIFICATIONS**

- Max load: 50kg (110lbs)
- Suitable for screens with VESA® and non-VESA fixings
- Base dimensions: W: 240mm D: 240mm
- Vented top and bottom panels allow airflow to and from the device
- Integrated cable management
- Simple 'hook-on' screen installation with all mounting hardware included



CONTENTS

Installation Safety Notes.....	2
Parts List.....	4
Installation Instructions.....	6
Product Dimensions.....	11
B-Tech Contact Details.....	12

INSTALLATION SAFETY INSTRUCTIONS



CAUTION: This mount is intended for use only with the maximum weights indicated. Use with equipment heavier than the maximum indicated may result in instability causing possible injury.

Do not attempt to install this product until all instructions and warnings have been read and properly understood.
Please keep these instructions for future reference.

Please check carefully to make sure there are no missing or defective parts - defective parts must never be used.
B-Tech AV Mounts, its distributors and dealers are not liable or responsible for damage or injury caused by improper installation, improper use or failure to observe these safety instructions. In such cases, all guarantees will expire.

General

B-Tech AV Mounts recommends that a professional AV installer or other suitably qualified person install this product. Great care must always be taken during installation as most AV equipment is of a fragile nature, possibly heavy and easily damaged if dropped.

If you do not fully understand the instructions or are not sure how to install this product safely, then please consult a professional for advice and/or to install this product for you. Failure to mount this product correctly may cause serious injury or death, both during installation and at any time thereafter.

Do not mount any AV equipment that exceeds the specific weight limit of the product you are installing.
This weight limit will be clearly stated on each product and its packaging and will vary from product to product.

Product location

Please pay careful attention to where this product is located. Designed for indoor use, this mount is suitable for public or home installation. Check load capacity of the floor prior to installation as some surfaces are not suitable for installation. When verifying the stability of the structure, consider the following external factors: The strength of the floor, exposure to sudden and severe wind and danger arising from contact with people and / or objects (eg installations in passageways, emergency exits), if located in a public or frequently populated area ensure that the product is out of the immediate reach of people. When drilling holes it is essential to avoid contact with electrical cables and water or gas pipes contained within. Use of a good quality live wire detector and hidden object locator is therefore recommended. Only drill into structures when you are sure it is safe to do so.

Fixing hardware

It is highly recommended that all fixing screws be used where supplied and that the purpose of all other fixing hardware is fully understood. In some cases more AV equipment fixing hardware will be supplied to accommodate different models of equipment and set up configurations. The installer must be satisfied that any supplied fixing hardware is suitable for each specific installation.

If any fixing screws or included hardware are deemed not sufficient for a safe installation then please consult a professional or your local hardware store.

Hazard limitation

When routing cables take advantage of any built in cable management features that the product might provide and ensure that all cables are tidy and secure. Check to see that any moving aspect of the product can do so unhindered by any cabling. Some products have moving parts and the potential to cause injury through the crushing or trapping of fingers or other body parts. Particular attention to the nature of moving parts is required especially when assembling installing and adjusting during set up. Immediately after installation double-check that the work done is safe and secure. Double-check all necessary fixings are present and are of ample tightness.

It is recommended that periodic inspections of the product and its fixing points are made as frequently as possible (no more than 6 months apart) to ensure that safety is maintained.

If in doubt consult a professional AV installer or other suitably qualified person.


- CN B-Tech AV Mounts 建议本产品由专业AV安装人员或其他合格人员安装。 B-Tech AV Mounts 及它的代理商、经销商不对由于不恰当的安装而造成的损失或伤害负责。 本产品必须安装在合适的架构上，并仅用于不超过所标示的最大承重。
- CS Společnost B-Tech AV Mounts doporučuje provést instalaci tohoto produktu instalátora AV či jinak způsobilé osoby. Společnost B-Tech AV Mounts, její distributoři a prodejci nenesou prostřednictvím odborného odpov ědnost za škody nebo zranění zp ůsobená nevhodnou instalací. Tento výrobek je nutno umístit do vhodné konstrukce a používat jen po uvedené maximální výšku.
- DE B-Tech AV Mounts empfiehlt, dass dieses Produkt durch einen qualifizierten AV-Techniker oder eine andere Person mit geeigneter Qualifikation installiert wird. B-Tech AV Mounts, ihre Distributoren und Händler können nicht für durch fehlerhafte Montage verursachte Beschädigung oder Verletzung haftbar bzw. verantwortlich gemacht werden. Dieses Produkt muss auf einen geeigneten Untergrund montiert werden und darf nur bis zum angegebenen Höchstgewicht verwendet werden.
- ES B-Tech AV Mounts recomienda que un instalador de audio y video profesional u otra persona debidamente cualificada instalen este producto. B-Tech AV Mounts, sus distribuidores y concesionarios no se hacen cargo ni se responsabilizan de ningún daño o lesión provocados por una instalación inapropiada. Este producto se debe montar en una estructura adecuada y se debe utilizar soportando solamente hasta el peso máximo indicado.
- FR B-Tech AV Mounts recommande de confier l'installation de ce produit à un installateur AV professionnel ou à une autre personne dûment qualifiée. B-Tech AV Mounts, ses distributeurs et ses revendeurs ne sauraient être tenus responsables de tout dégât ou de toute blessure résultant d'une installation incorrecte. Ce produit doit être monté sur un support approprié et utilisé dans la limite du poids maximum indiqué.
- IT B-Tech AV Mounts consiglia di affidare l'installazione di questo prodotto a un installatore specializzato o ad altra persona adeguatamente qualificata. B-Tech AV Mounts, i suoi distributori e rivenditori non accettano alcuna responsabilità nei riguardi di eventuali danni o infortuni causati da un'errata installazione. Questo prodotto deve essere fissato a una struttura idonea e utilizzato unicamente sino al peso massimo indicato.
- JP B-Tech AV Mounts はAV設置の専門家または適合した知識を備えた人が製品を設置することを推奨します。B-Tech AV Mounts と販売店、取引先はこうした安全指針に従わない場合に随伴される製品の損傷や傷害に対する責任を負いません。場合によって製品が設置されるに適していないところもあるので設置位置に特別な注意を傾けてください。この製品の位置に注意を傾けて設置に適していない壁があるかを確認してください。指定した重さ制限を超過するAV装備を装着しないでください。
- KR B-Tech AV Mounts 는 AV 설치 전문가 또는 적합한 지식을 갖춘 사람이 제품을 설치하도록 권장합니다. B-Tech AV Mounts 와 판매점, 거래처는 이러한 안전 지침을 따르지 않을 경우에 수반될 제품의 손상이나 손해에 대한 책임을 지지 않습니다. 경우에 따라 제품이 설치되기에 적합하지 않은 곳들도 있으므로 설치 위치에 특별한 주의를 기울여 주시기 바랍니다. 제품의 설치 위치에 주의를 기울여 확인하십시오. 지정된 무게 제한을 초과하는 AV 장비를 장착하지 마십시오.
- NL B-Tech AV Mounts adviseert om dit product te laten installeren door een professionele AV-installateur of andere hiervoor gekwalificeerde persoon. B-Tech AV Mounts , haar distributeurs en dealers zijn niet aansprakelijk of verantwoordelijk voor schade of letsel die is veroorzaakt door onoordeelkundige installatie. Dit product moet worden gemonteerd aan een geschikte constructie, waarbij het aangegeven maximum gewicht niet mag worden overschreden.
- PL Firma B-Tech AV Mounts zaleca, aby ten produkt był instalowany przez profesjonalnych instalatorów AV lub inny odpowiednio przeszkolony personel. Firma B-Tech AV Mounts, jej dystrybutorzy i dealerzy nie ponoszą odpowiedzialności za uszkodzenia lub obrażenia ciała powstałe w wyniku nieprawidłowej instalacji. Niniejszy produkt musi być amontowany na odpowiedniej powierzchni, a podczas użytkowania nie wolno przekraczać podanego maksymalnego obciążenia.
- PT A B-Tech AV Mounts recomenda que a instalação deste produto seja efectuada por um instalador de AV instalador de AV profissional ou outra pessoa devidamente habilitada. A B-Tech AV Mounts e os seus distribuidores e concessionários não são responsáveis por danos ou lesões causados por uma instalação incorrecta. Este produto tem de ser montado numa estrutura adequada e utilizado somente até ao peso máximo indicado.
- RU Компания B-Tech AV Mounts рекомендует, чтобы установка данного изделия производилась инженером по установке аудио-видеотехники или другим специалистом с соответствующей квалификацией. Компания B-Tech AV Mounts ее дистрибьюторы и дилеры не несут ответственности за повреждения или травмы, полученные в результате неправильной установки.


توصي بي- تك للتجارة الدولية المحدودة بأن شخص محترف في تركيب ال AV او شخص مؤهل تأهيلا مناسباً لتركيب هذا المنتج. بي- تك للتجارة الدولية، موزعيها والتجار ليست عرضة أو مسؤولة عن الأضرار أو الإصابات الناجمة عن تركيب غير سليم، والاستخدام غير السليم أو عدم مراعاة هذه التعليمات للسلامة. يجب أن يتم تركيب هذا المنتج في بنية مناسبة ويجب استخدامه فقط لدعم الحد الأقصى للوزن المشار إليه.

BT7004 PARTS LIST

PLEASE KEEP THIS FOR FUTURE REFERENCE

Note: Components supplied may differ from what is shown depending on the type and size of the display being installed.

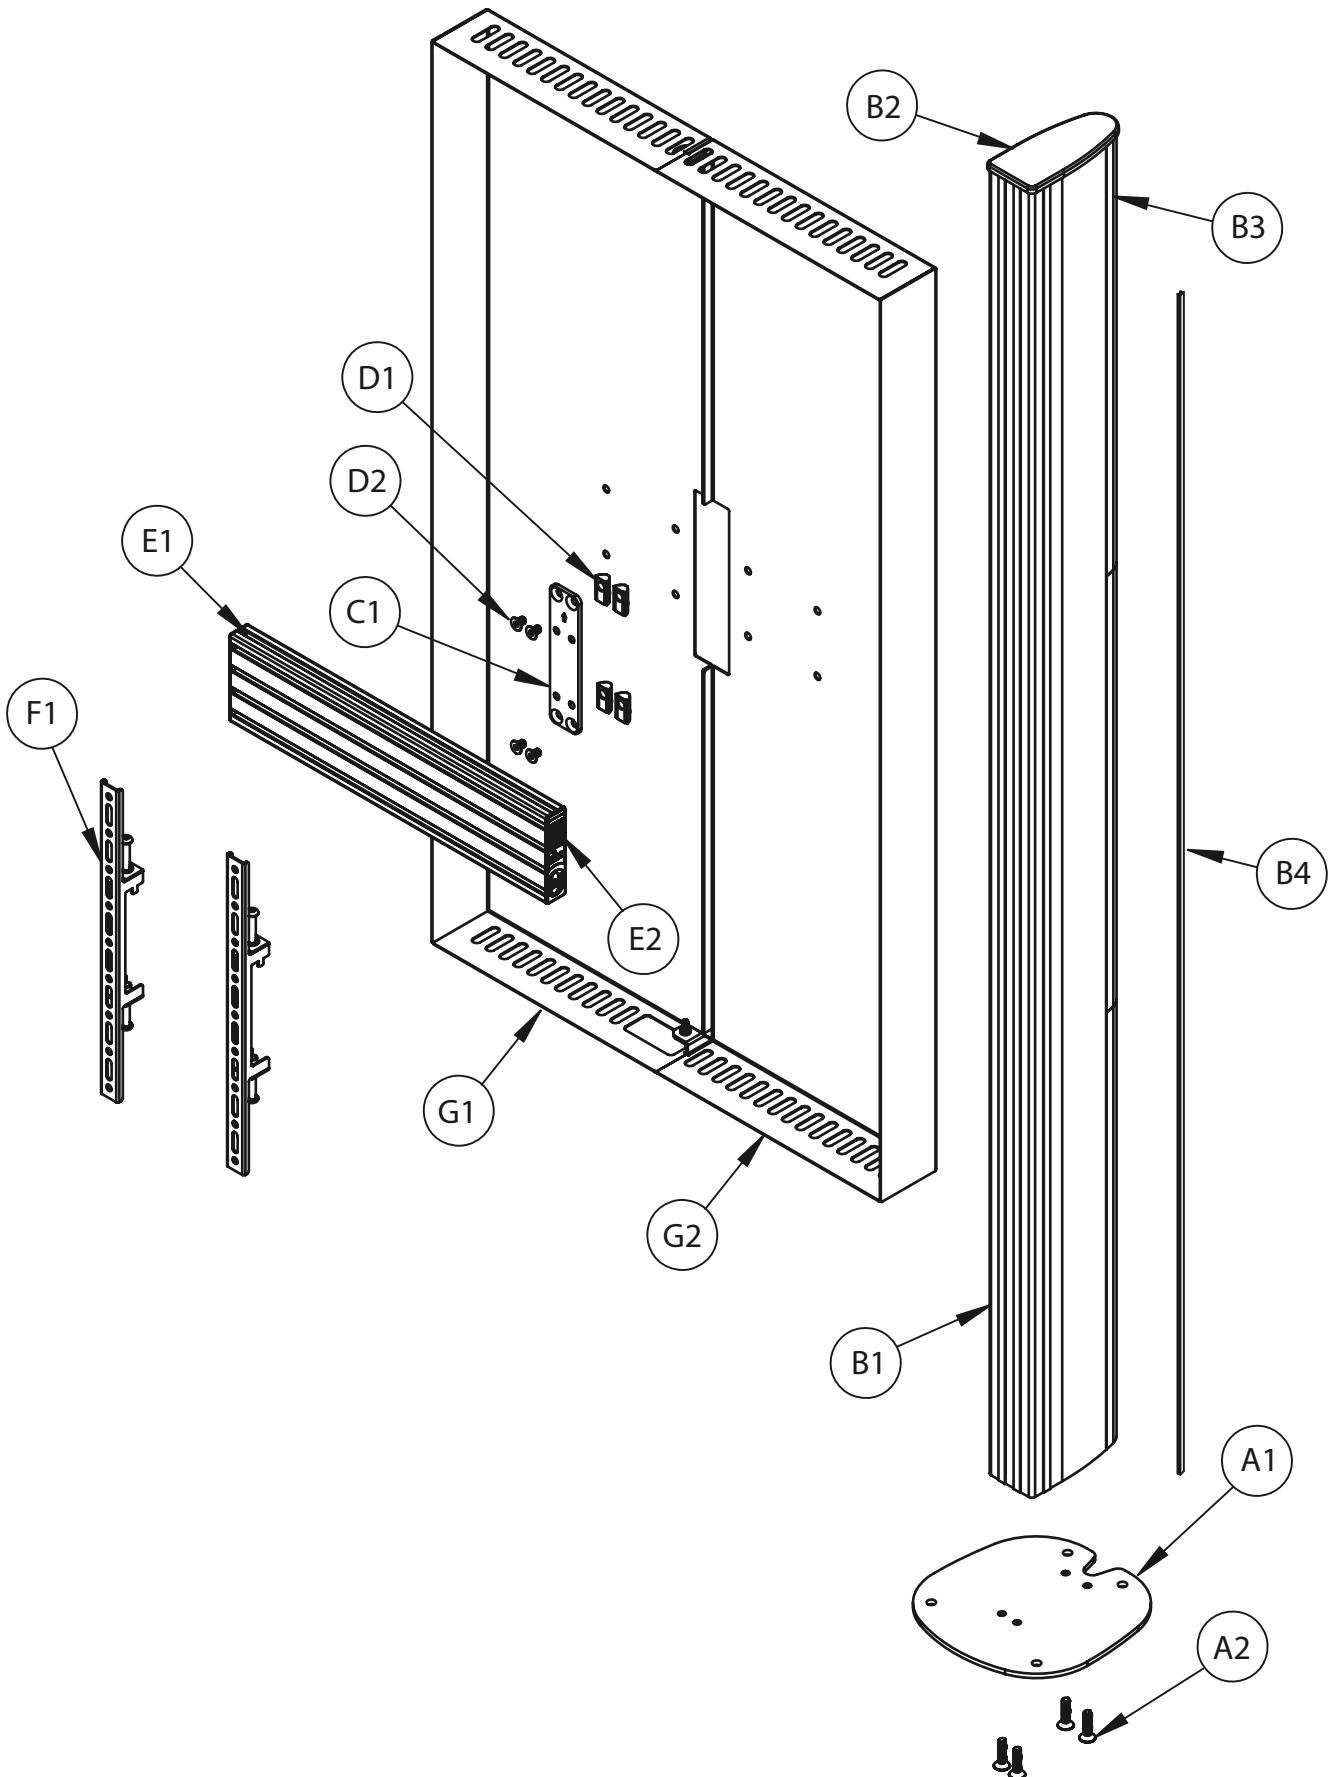

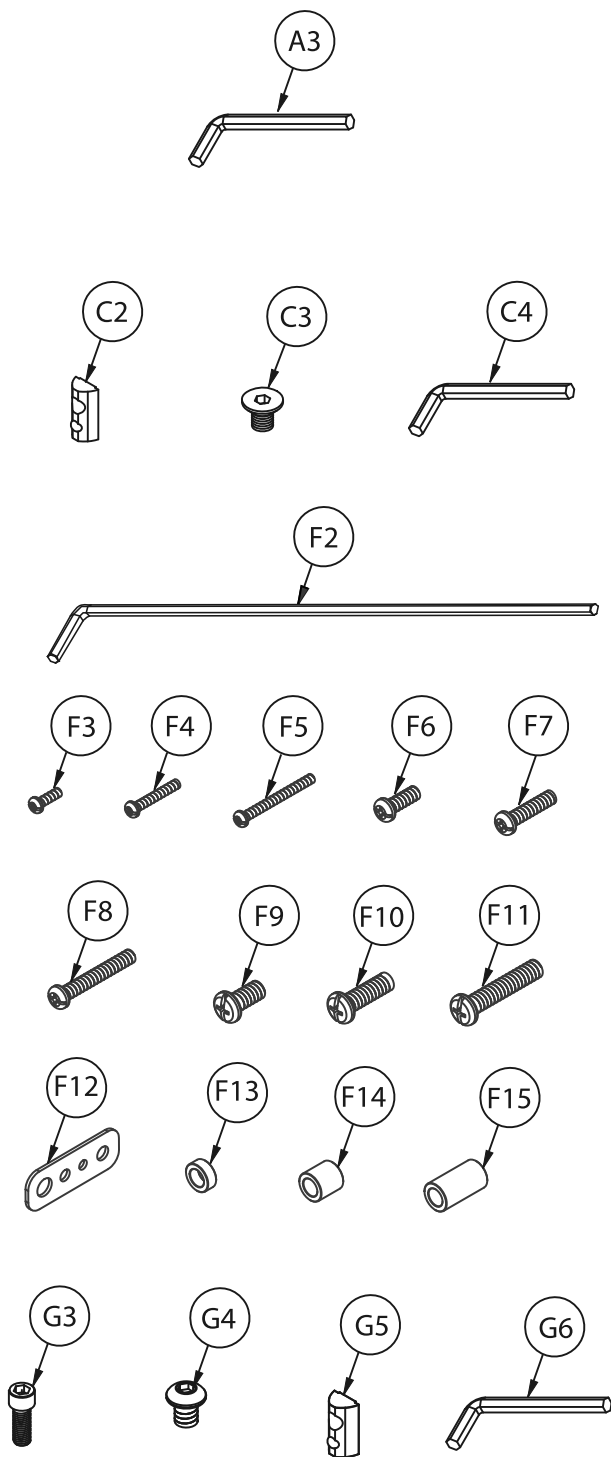

ITEM	PART	DESCRIPTION	QTY
BASE	A1	BOLT DOWN BASE	1
	A2	M8 x 35mm CSK SCREW	4
	A3	5AF HEX KEY	1
COLUMN	B1	VERTICAL COLUMN	1
	B2	END CAP	1
	B3	CABLE COVER	3
	B4	PLASTIC SLOT INSERT	4
MOUNTING BRACKET	C1	MOUNTING BRACKET	1
	C2	M8 SLIDING INSERT	4
	C3	M8 x 12mm SCREW	4
	C4	5AF HEX KEY	1
COLUMN FIXINGS	D1	M8 SLIDING INSERT	4
	D2	M8 x 12mm SCREW	4
RAIL	E1	MOUNTING RAIL	1
	E2	END CAP	2
ARMS	F1	SCREEN INTERFACE ARM	2
	F2	5AF LONG HEX KEY	1
SCREEN FIXING KIT	F3	M4 x 12mm SCREW	4
	F4	M4 x 25mm SCREW	4
	F5	M4 x 40mm SCREW	4
	F6	M6 x 16mm SCREW	4
	F7	M6 x 25mm SCREW	4
	F8	M6 x 40mm SCREW	4
	F9	M8 x 16mm SCREW	4
	F10	M8 x 25mm SCREW	4
	F11	M8 x 40mm SCREW	4
	F12	MULTIWASHER	4
	F13	5mm SPACER	4
	F14	13mm SPACER	4
	F15	24mm SPACER	4
SCREEN ENCLOSURE	G1	LEFT COVER PLATE	1
	G2	RIGHT COVER PLATE	1
	G3	M6 x 20mm CAP HEAD SCREW	2
	G4	M8 x 10mm HEX SCREW	8
	G5	M8 SLIDING INSERT	8
	G6	5AF HEX KEY	1

INSTALLATION TOOLS REQUIRED

Drill



Drill bit



Pencil




Crosshead screwdriver



Spanner




Pliers/Cutter



INSTALLATION INSTRUCTIONS


1. ATTACH COLUMN TO BASE

Fix item A1 to item B1 using item A2.

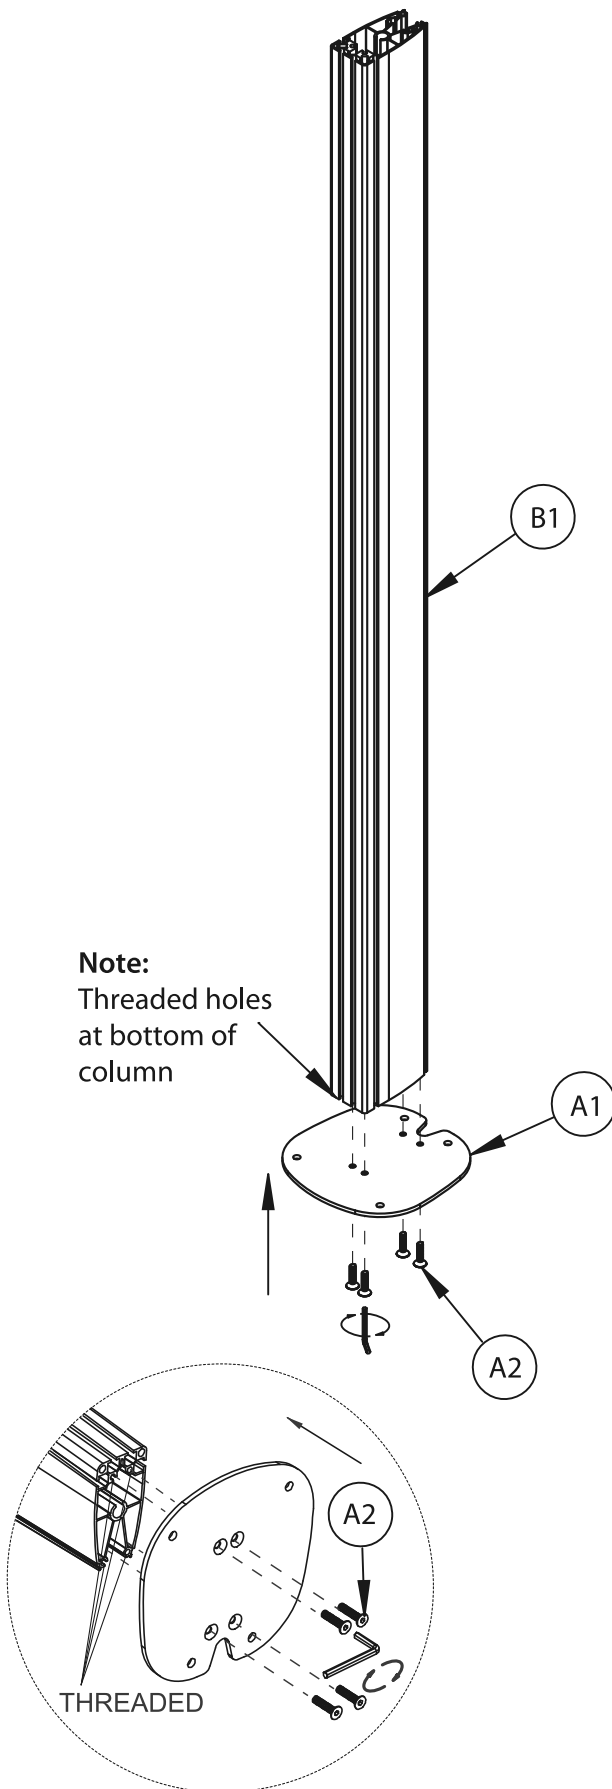



2. BOLT STAND TO FLOOR

Pre-drill holes in the floor and using suitable floor fixings (not supplied), fix item A1 to the floor.

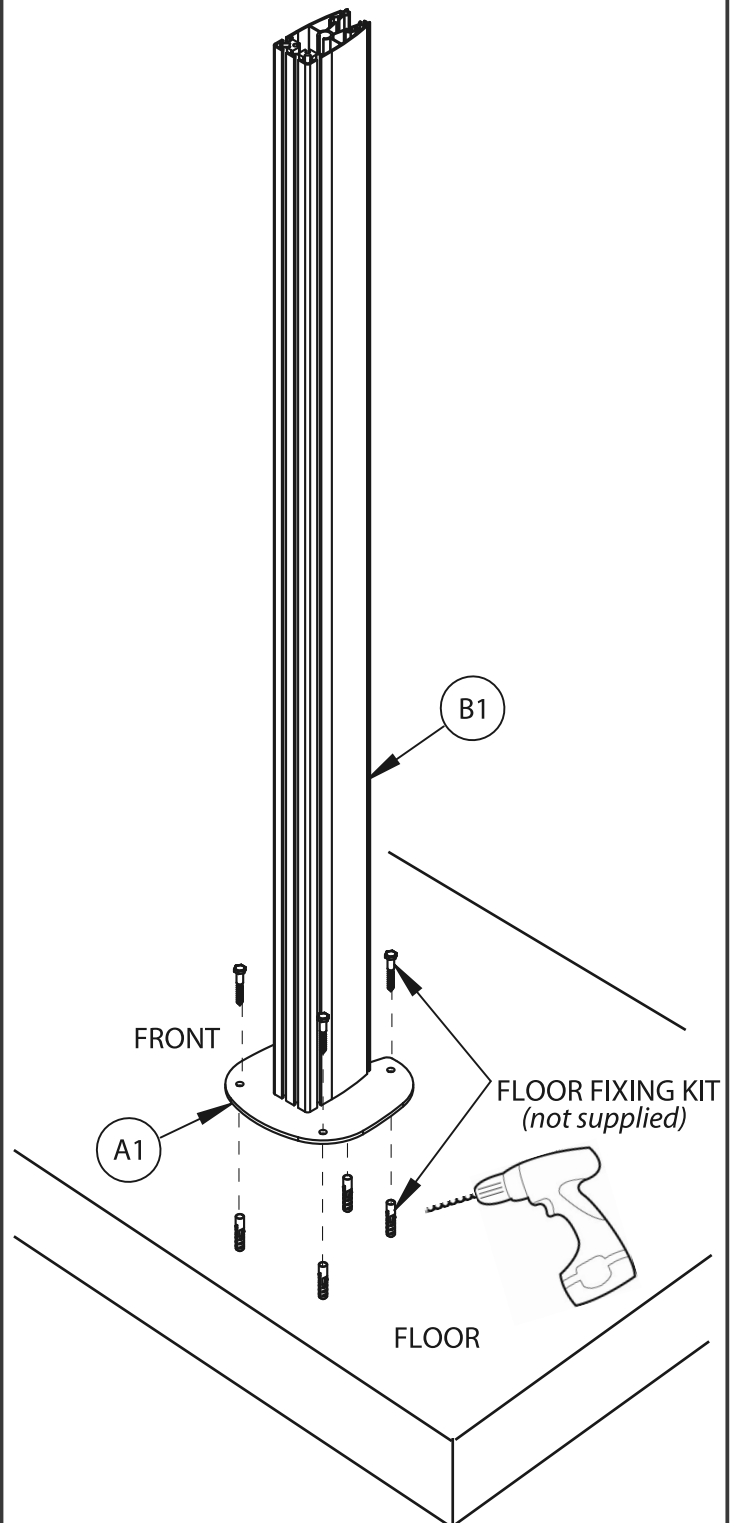



3. ATTACH MOUNTING BRACKET TO RAIL

- i. Insert 4 x *item C2* into *item E1* (2 in the top channel, 2 in the bottom channel).
- ii. Fix *item C1* centrally to *item E1* using *item C3*.

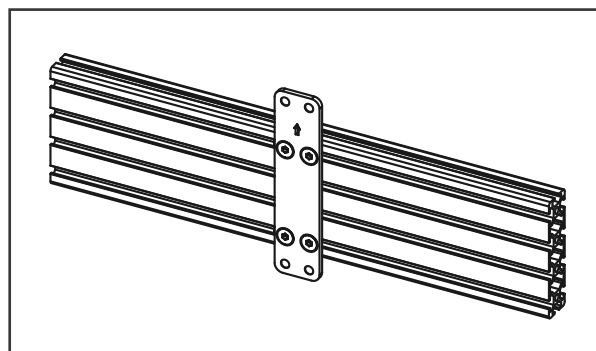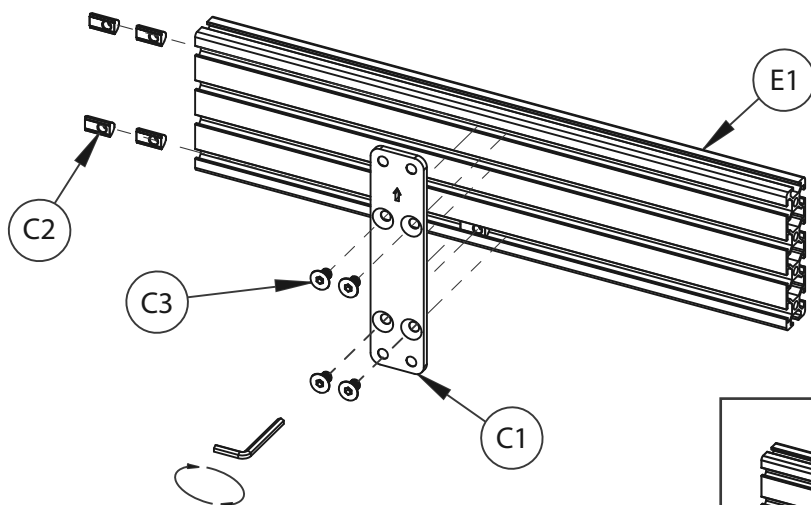

4. FIX RAIL TO COLUMN

- i. Insert 4 x *item D1* into *item B1* (2 in each channel).
- ii. Attach *item C1* to *item B1* using *item D2*. Leave a 6mm gap at top of the column.

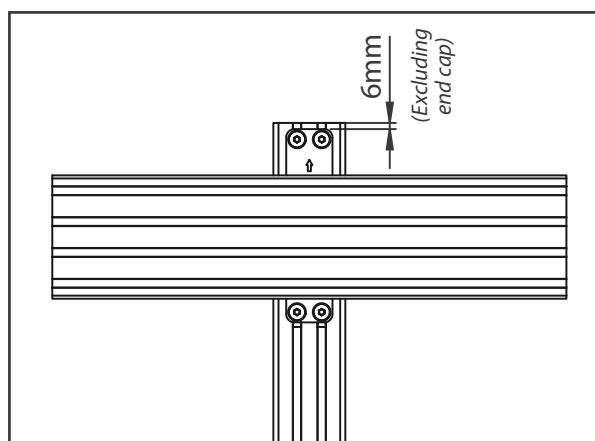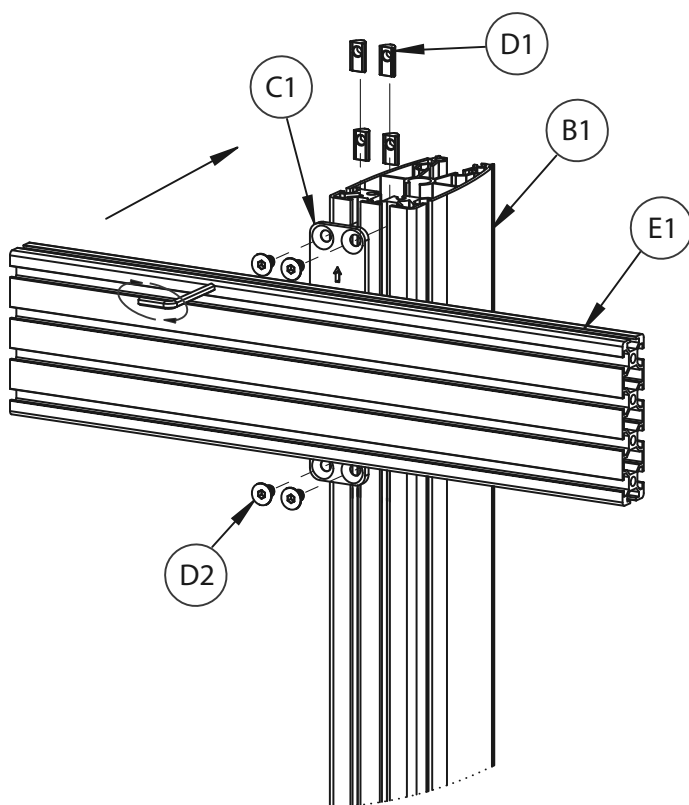


5. ATTACH INTERFACE ARMS TO SCREEN

Fix item *F1* to the rear of the screen using items *F3 - F15*.

Note: Ensure the arms are facing the correct way round and the same holes are used on both arms.



PORTRAIT MOUNTING

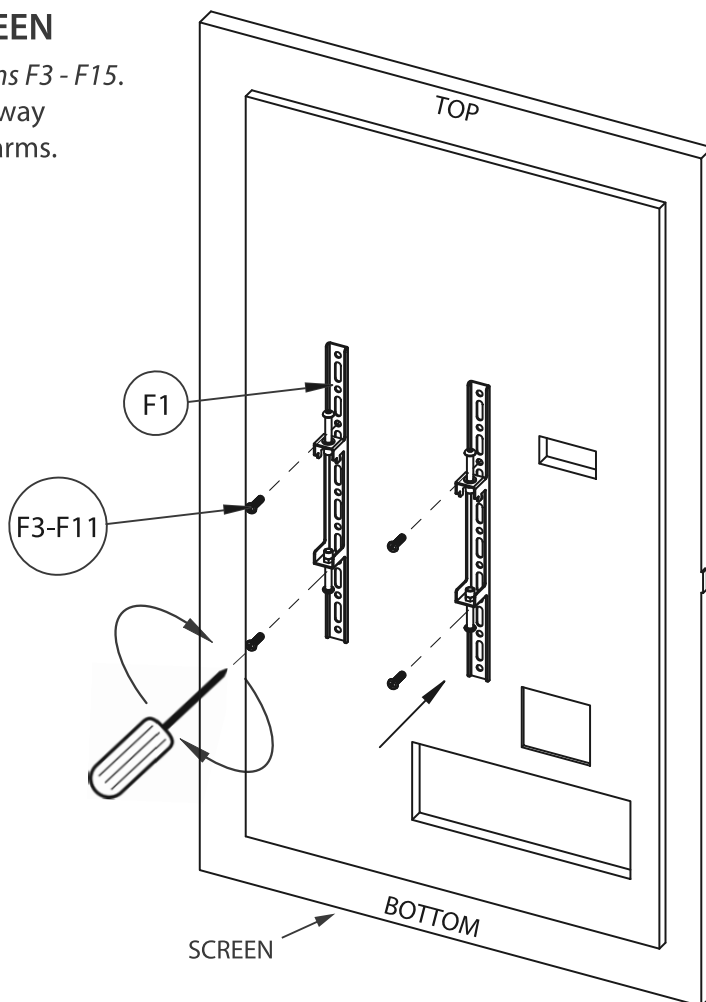

6. MOUNT SCREEN ONTO RAIL


i. Hook screen onto item *E1* using items *F1*.

ii. Secure screen to stand by tightening the safety screws on the bottom of items *F1*.

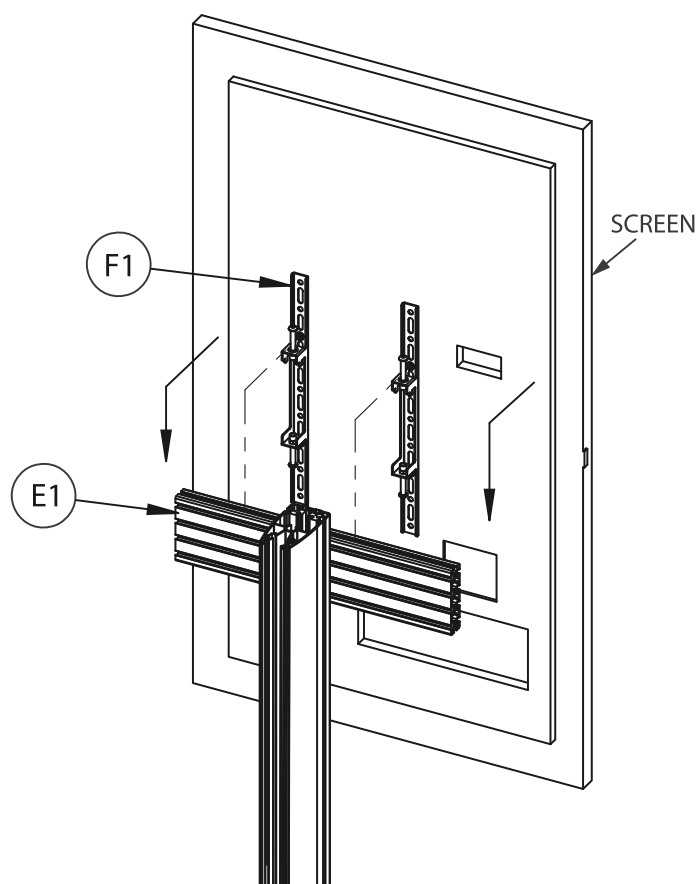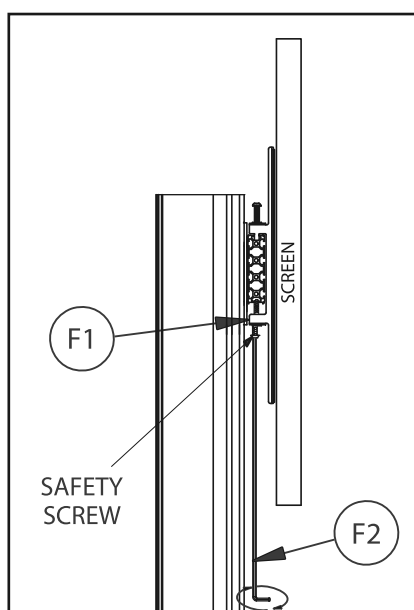


7. FIX SCREEN ENCLOSURE

- i. Insert 8 x *item G5* into *item E1* (4 in the top channel, 4 in the bottom channel) and position as shown in *fig. 1*.
- ii. Attached *item E2* to the ends of *item E1*.

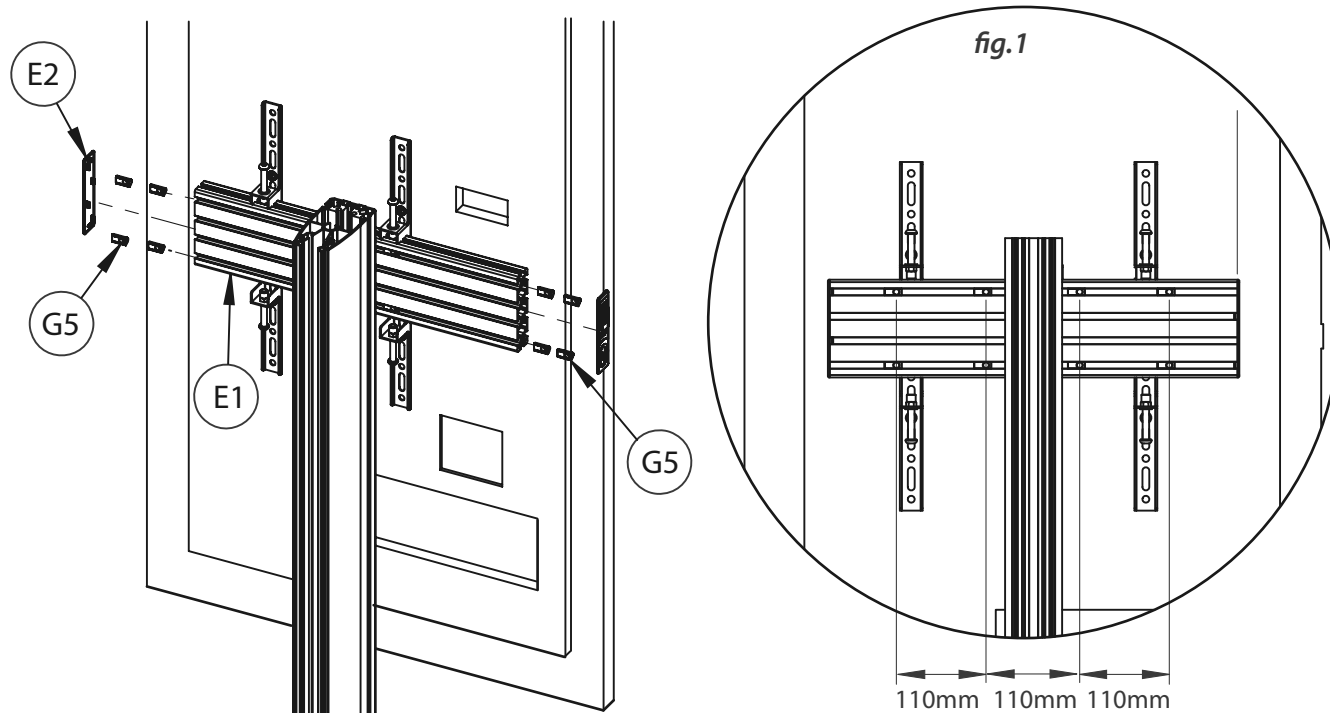


- iii. Connect *items G1 & G2* around the screen and secure to *item E1* using *item G4*.

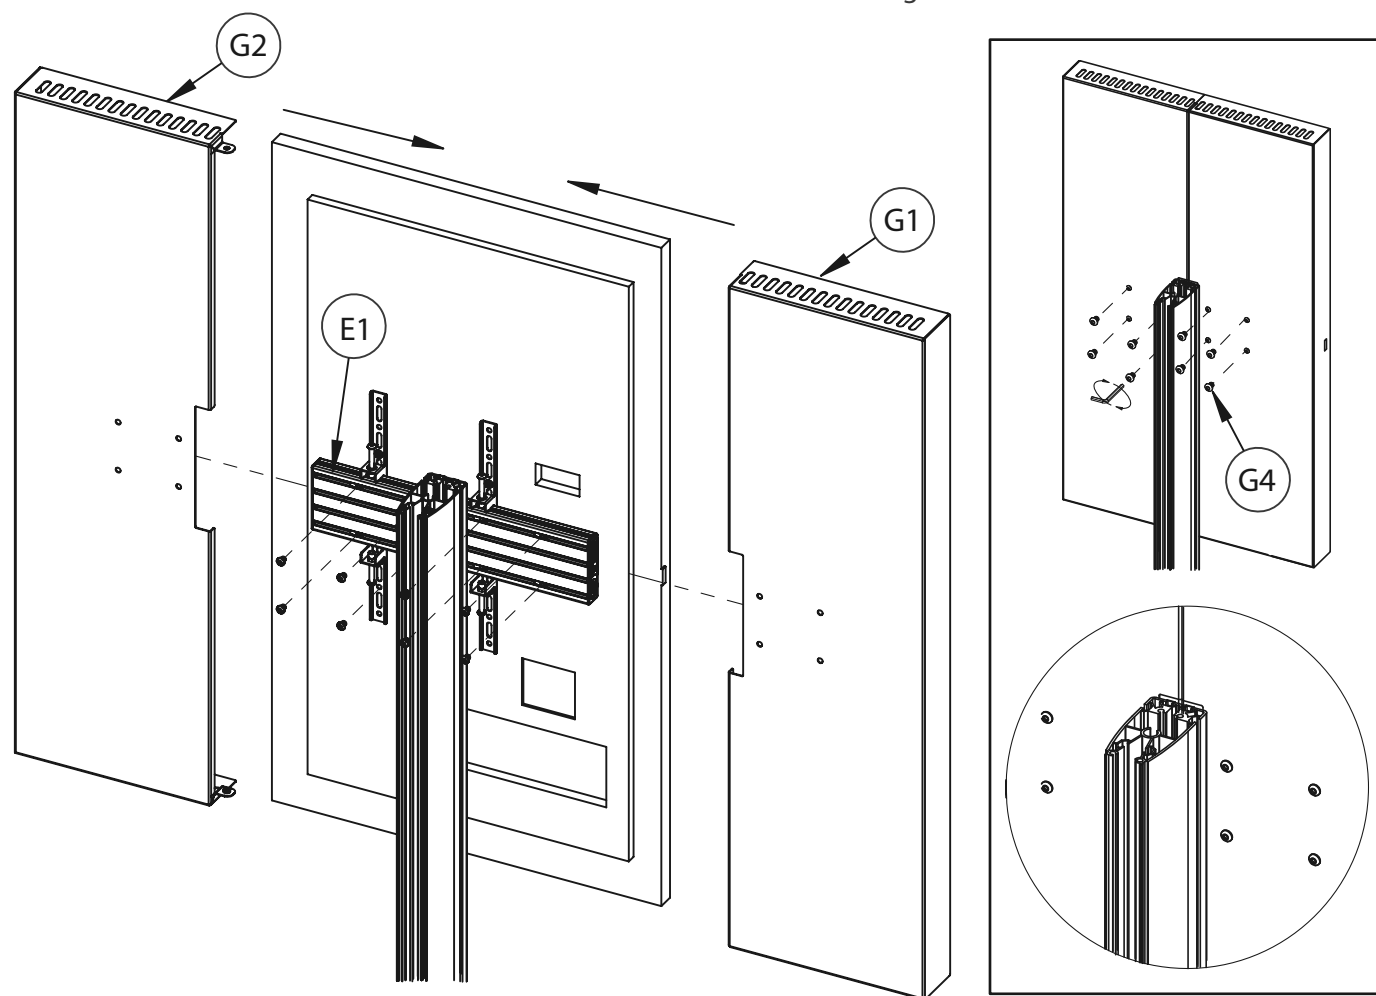


8. LOCK SCREEN ENCLOSURE

Fix items G1 & G2 together at the top and bottom using item G3.

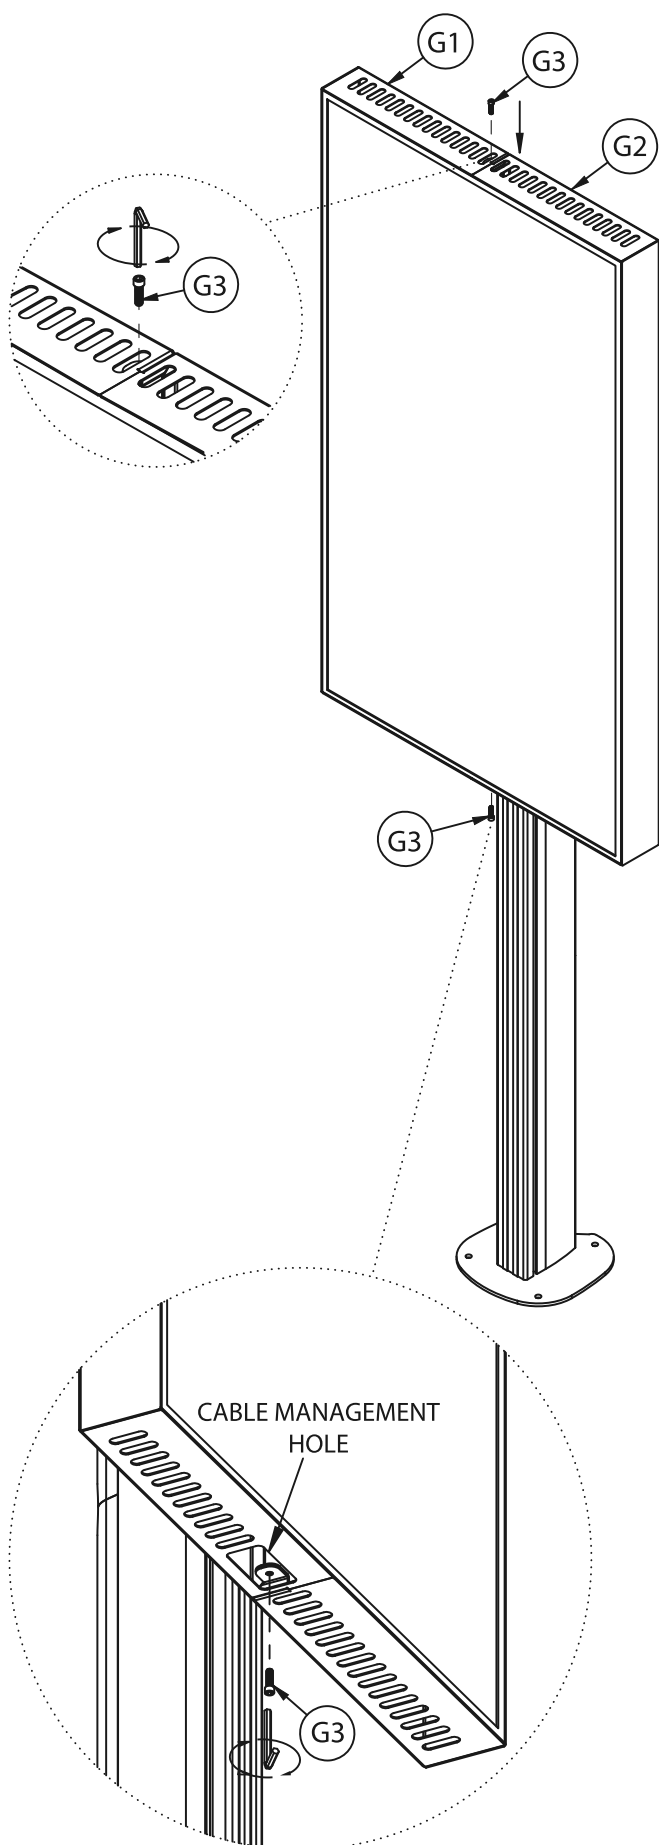

9. ATTACH COVER PLATES


Once cables have been routed through the stand, attach items B2, B3 & B4 onto item B1.

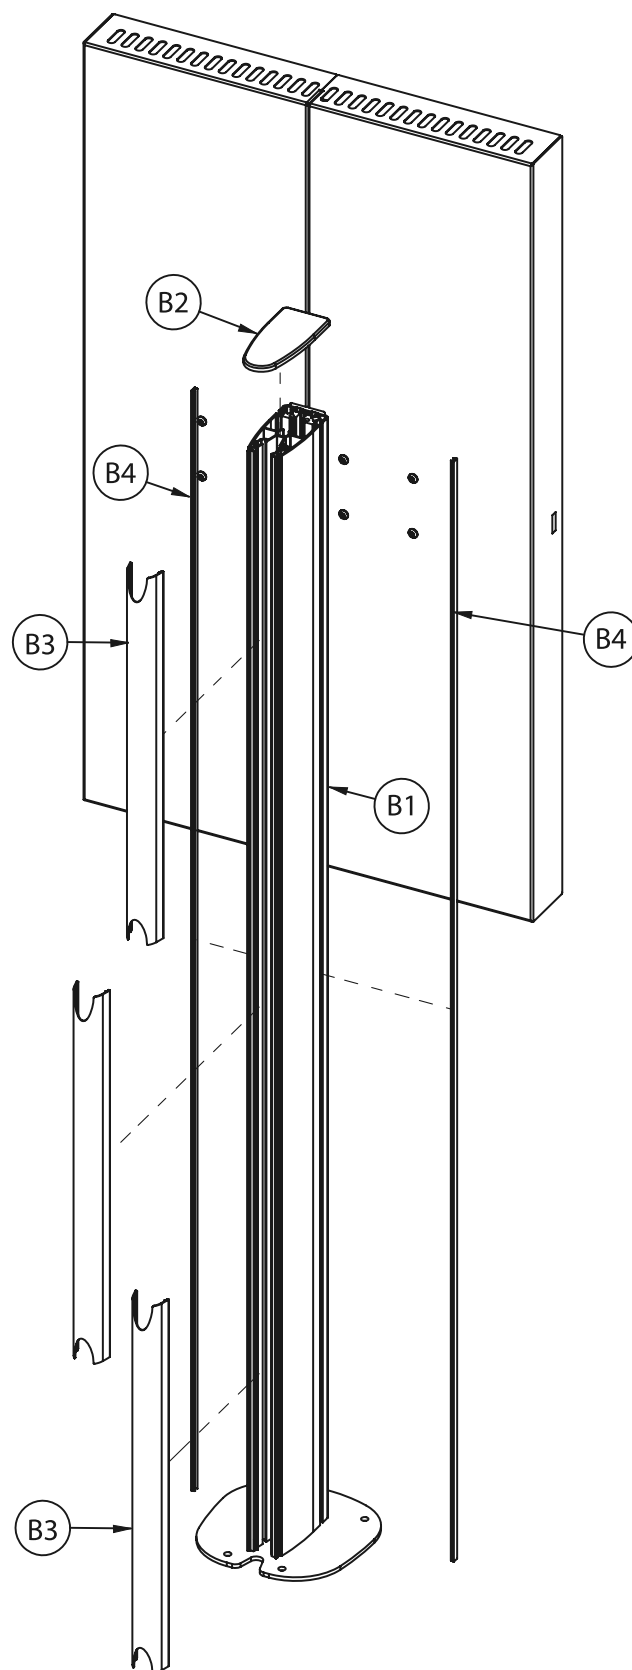


BT7004 **DIMENSIONS**

PLEASE KEEP THIS FOR FUTURE REFERENCE


FRONT VIEW

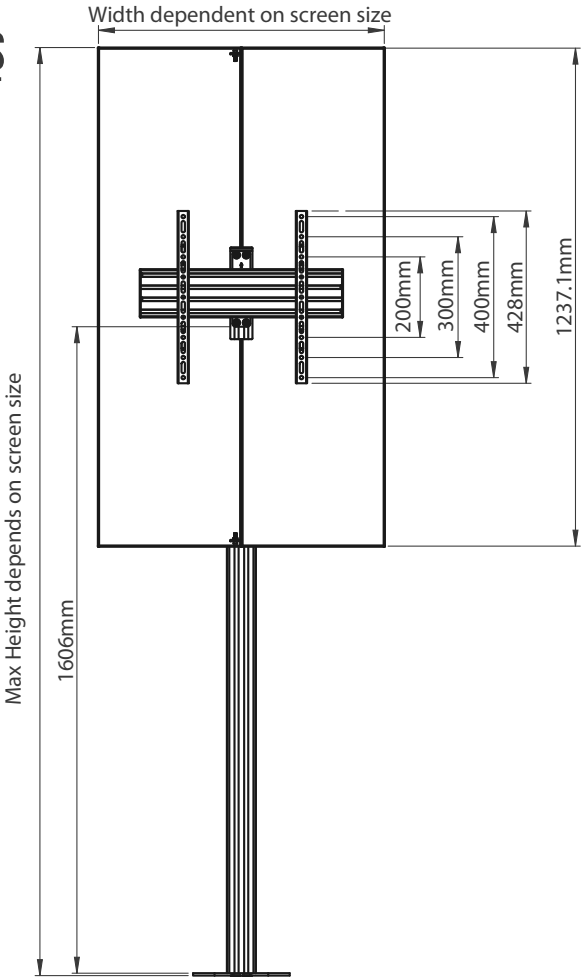


SIDE VIEW

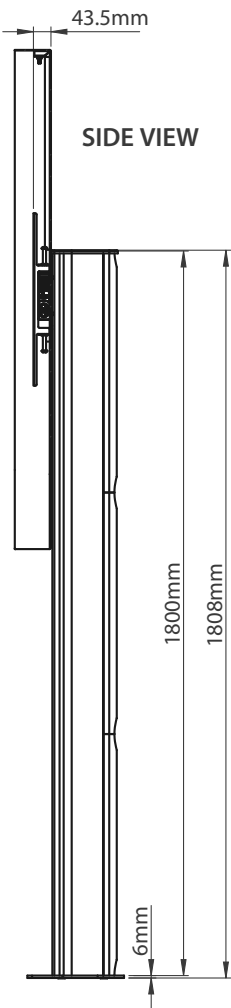


REAR VIEW

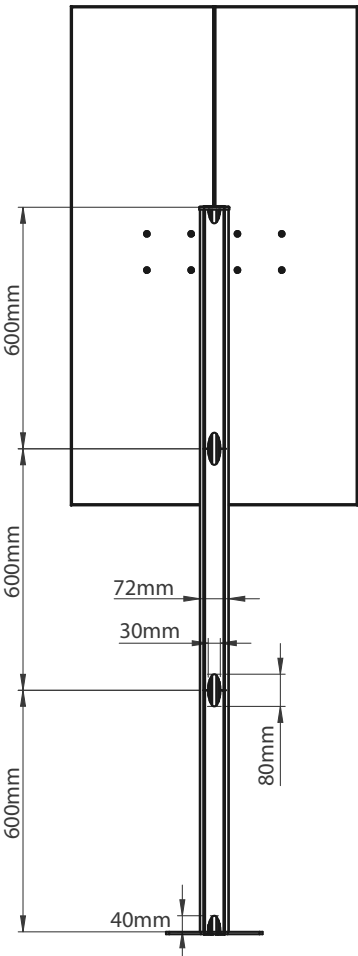

TOP VIEW

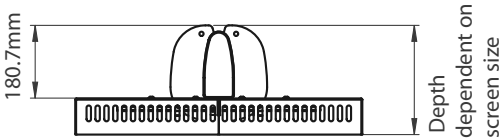

BASE PLATE

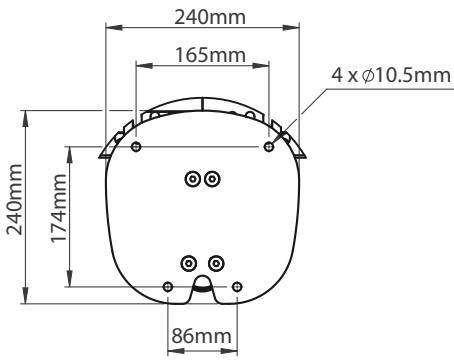

THESE INSTRUCTIONS ARE INTENDED AS A GUIDE ONLY AND B-TECH ACCEPTS NO LIABILITY FOR THE ACCURACY OF THE INFORMATION CONTAINED IN THIS DOCUMENT.



CONTACT:

info@btechavmounts.com

©2021 B-Tech AV Mounts. All rights reserved.

B-Tech AV Mounts is a division of B-Tech International Design and Manufacturing Ltd.

B-Tech AV Mounts and the B-Tech logo are registered trade marks.

All other brands and product names are trademarks of their respective owners.

Photographs are for illustrative purposes only. E&OE.

AMA-BT7004-V1-0221-BTECH MADE IN VIETNAM

