




Front View

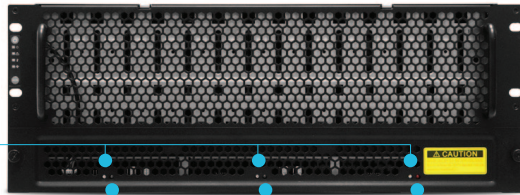


Status LED (Blue)

Fail LED (Red)

Features

- Intelligent Enclosure Management
- Individual drive power management
- Easy swap design for maintenance and management
- Zoning support for easy deployment
- Optimized Thermal and Energy saving solution
- Tool-less drive trays

Rear View

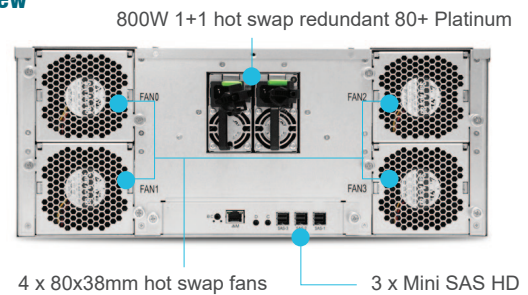

Specifications

General	Number of Expander	Single
	Expander Chip	Broadcom SAS35x36R + Broadcom SAS35x28R
	Host/Expansion Interface	3 x Mini SAS HD
Drives Supported	Drive Interface	12Gb and 6Gb SAS/SATA
	Form Factor	3.5"
Administration / Management	Admin/Firmware Upgrade	In-band & Serial port interface IEM port (Optional)
	LED indicators, Audible Alarm	Yes
Hot swap and Redundancy	Drive Bays	60
	Cooling	4 x 80x38mm hot swap fans
	Power Supply	800W 1+1 hot swap redundant 80+ Platinum
	Power Entry	Dual AC inlet
	Expander Modules	Single expander

Electrical and Environmental	Universal A/C Input	100~240V AC full range Option : 336HVDC or -48DC
	Operating Environment	Temperature : 0°C to 35°C Relative humidity : 20% to 80%
	Non-operating Environment	Temperature : -20°C to 60°C Relative humidity : 10% to 90%
Physical Specification	Dimensions (W x D x H)	mm : 435 x 795 x 175.8 inches : 17 x 31.3 x 6.9
	Gross Weight (w/ PSU, Rail and Pallet; w/o Disks)	kgs : 52.8 lbs : 116.4
	Packaging Dimensions (W x D x H)	mm : 620 x 1140 x 550 inches : 24.4 x 44.9 x 21.7
	Mounting	Standard 26" tool-less slide rail

Ordering Information

SKU Number	Description
XJ1-40602-01	4U 60x 3.5" hot-swap bays, easy-swap JBOD w/ single SAS 12G expander controller, tool-less HDD tray, 800W 1+1 AC100~240V 80+ platinum CRPS, with tool-less slide rail
XJ1-40602-02	4U 60x 3.5" hot-swap bays, easy-swap JBOD w/ single SAS 12G expander controller, tool-less HDD tray, 800W 1+1 AC100~240V 80+ platinum CRPS, single BMC option, with tool-less slide rail
XJ1-40602-03	4U 60x 3.5" hot-swap bays, easy-swap JBOD w/ single SAS 12G expander controller, tool-less HDD tray, 800W 1+1 DC336V CRPS, with tool-less slide rail
XJ1-40602-04	4U 60x 3.5" hot-swap bays, easy-swap JBOD w/ single SAS 12G expander controller, tool-less HDD tray, 800W 1+1 DC336V CRPS, single BMC option, with tool-less slide rail
XJ1-40602-05	4U 60x 3.5" hot-swap bays, easy-swap JBOD w/ single SAS 12G expander controller, tool-less HDD tray, 800W 1+1 DC-48V CRPS, with tool-less slide rail
XJ1-40602-06	4U 60x 3.5" hot-swap bays, easy-swap JBOD w/ single SAS 12G expander controller, tool-less HDD tray, 800W 1+1 DC-48V CRPS, single BMC option, with tool-less slide rail