





Front View

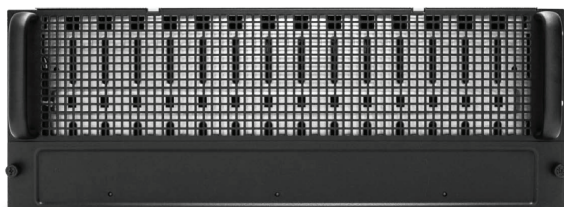

Features

- Intelligent Enclosure Management
- Individual drive power management
- Hot swap design for easy maintenance and management
- Enclosure Cable Management Kit
- Tool-less drive trays

Rear View

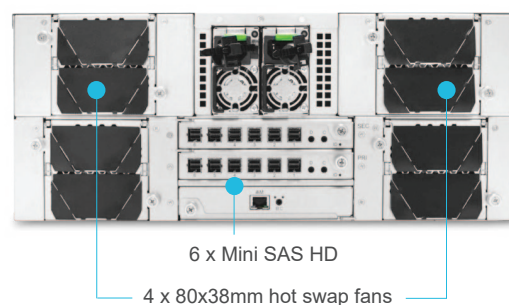

Specifications

General	Number of Expander	Single/Dual
	Expander Chip	Broadcom SAS3x36R + Broadcom SAS3x48
	Host/Expansion Interface	6 x Mini SAS HD (SFF-8644) per expander module
Drives Supported	Drive Interface	12Gb & 6Gb SAS if using dual expanders 12Gb & 6Gb SAS/SATA if using single expander
	Form Factor	3.5"
Administration / Management	Admin/Firmware Upgrade	In-band & Serial port interface IEM port (Optional)
	LED indicators, Audible Alarm	Yes
Hot swap and Redundancy	Drive Bays	60
	Cooling	4 x 80x38mm hot swap fans
	Power Supply	1200W 1+1 hot swap redundant 80+ Platinum
	Power Entry	Dual AC inlet
	Expander Modules	Dual SAS topology (Optional)

Electrical and Environmental	Universal A/C Input	100~127V,50/60Hz, Total Power 800W 200~240V,50/60Hz, Total Power 1200W Max
	Operating Environment	Temperature : 0°C to 35°C Relative humidity : 20% to 80%
	Non-operating Environment	Temperature : -20°C to 60°C Relative humidity : 10% to 90%
Physical Specification	Dimensions (W x D x H)	mm : 438 x 865.3 x 175.8 inches : 17.2 x 34 x 6.9
	Gross Weight (w/ PSU, Rail and Pallet; w/o Disks)	kgs : 58.5 lbs : 128.9
	Packaging Dimensions (W x D x H)	mm : 630 x 1220 x 510 inches : 24.8 x 48 x 20
Mounting	Options	• Long tool-less slide rail for 1.2m Rack (with CMA support) • Cable management kit
		• Short tool-less slide rail for 1m Rack (without CMA support)

Ordering Information

SKU Number	Description
XJ1-40603-01	4U 60x 3.5" hot-swap bays, hot-swap JBOD with single SAS 12G expander controller, tool-less HDD tray, 1200W 1+1 hot-swap redundant 80+ platinum
XJ1-40603-02	4U 60x 3.5" hot swap bays, hot-swap JBOD with single SAS 12G expander controller, tool-less HDD tray, 1200W 1+1 hot-swap redundant 80+ platinum, with BMC
XJ1-40603-03	4U 60x 3.5" hot-swap bays, hot-swap JBOD with dual SAS 12G expander controller, tool-less HDD tray, 1200W 1+1 hot-swap redundant 80+ platinum
XJ1-40603-04	4U 60x 3.5" hot-swap bays, hot-swap JBOD with dual SAS 12G expander controller, tool-less HDD tray, 1200W 1+1 hot-swap redundant 80+ platinum, with BMC