


CAMERA

# TD-9322A3-LR

## 2MP HD ANPR Box Network Camera



- Starlight
- 2MP ( 1920 × 1080 ) @30fps
- Support smart H.265/H.264 coding
- ICR auto switch, true day/night
- 3D DNR, true WDR, HLC, BLC and ROI coding
- Built-in micro SD card slot, up to 256GB
- 1CH audio input; 1CH audio output; 1CH built-in MIC
- 2CH alarm input; 2CH alarm output
- USB × 1; RS485 × 1; ABF; Reset
- AC24V/DC12V/PoE power supply
- Support three streams
- P2P function optional
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent analytics: video abnormality (video blur&video color cast detection, scene change), license plate recognition



[en.tvt.net.cn](http://en.tvt.net.cn)

For more information, please visit our website

**Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.**

Address: 23<sup>rd</sup> Floor, Block B4, Building NO.9, Shenzhen Bay  
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong  
Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777


E-mail: [overseas@tvt.net.cn](mailto:overseas@tvt.net.cn)

### SPECIFICATIONS


Specifications	Model	TD-9322A3-LR
<b>Camera</b>		
Image Sensor		1 / 2.8" CMOS
Image Size		1920 × 1080
Electronic Shutter		1 / 25 s ~ 1 / 10000 s
Iris Type		DC Iris
Min. Illumination		Color: 0.0026 lux@F1.2, AGC ON
Lens Mount		CS
Wide Dynamic Range		120dB
BLC		Yes
HLC		Yes
ABF		Yes
Defog		Yes
Digital NR		3D DNR
<b>Image</b>		
Video Compression		Main stream: Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.264 Compression Standard		Baseline Profile/Main Profile/High Profile
Resolution		1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, CIF, 480 × 240
Main Stream		60Hz : 1080P / 720P( 1 ~ 30fps ); 50Hz : 1080P / 720P( 1 ~ 25fps ) HFR Mode: 1080P/720P (60Hz: 1~60fps; 50Hz: 1~50fps)
Sub Stream		60Hz : 720P/D1/CIF/480×240 (1~30fps); 50Hz: 720P/D1/CIF/480×240 (1~25fps)
Third Stream		60Hz : D1/CIF/480×240 (1~30fps); 50Hz: D1/CIF/480×240 (1~25fps)
Bit Rate		64 Kbps ~ 6 Mbps
Bit Rate Type		VBR / CBR
Audio Compression		G711A / U
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI		Each ROI to be configured separately
<b>Interfaces</b>		
Network		RJ 45
Video Output		No
Audio		1CH audio input; 1CH audio output; 1CH built-in MIC
Storage		Built-in micro SD card slot; up to 256GB
Reset		Yes
Alarm		2CH alarm input; 2CH alarm output
RS 485		Yes
USB		Yes
<b>Functions</b>		
Remote Monitoring		Web browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol		UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, ICMP, IGMP, FTP, PPPoE, DDNS, SMTP, SNMP, HTTP, 802.1x, UPnP, HTTPs, QoS
Interface Protocol		ONVIF
Storage		Network remote storage; micro SD card storage
Smart Alarm		Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection
Intelligent Analytics		Video blur detection, video color cast detection, scene change detection, license plate recognition
General Function		Watermark, IP address filtering, video mask, heartbeat, password protection, non-photosensitive switch, image distortion correction
PoE		Yes , IEEE802.3af
<b>LPR</b>		
Snapshot		Overview and cutout of plate for picture
Vehicle Plate Database		10,000
Capture Speed Range		0~70km/h

Others	
Power Supply	AC24V/DC12V/PoE
Power Consumption	< 6.5W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions ( mm )	143 × 79 × 64
Weight ( net )	Approx. 0.65KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)

### DIMENSIONS

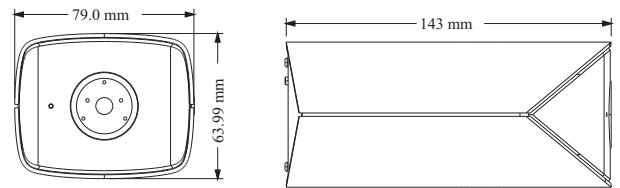

### AVAILABLE ACCESSORIES

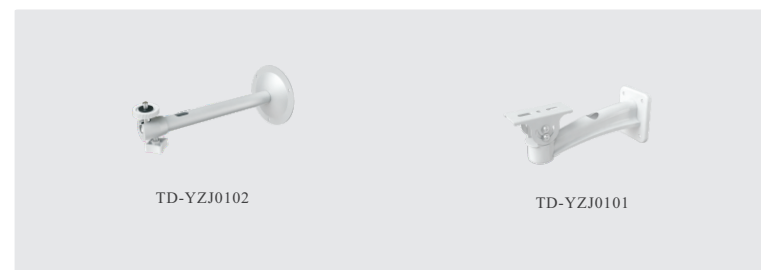

### AVAILABLE MODEL

Available Model	TD-9322A3-LR
-----------------	--------------