

Uface 7T Pro

AI Face Recognition Terminal

Intelligent ISP algorithm | Visual intercom | IP65 |
For turnstiles

Hardcore All-Rounder, Be Your Good Assistant

Built-in card reader external 4G/Fingerprint module to satisfy various demands




Integrated Intelligent ISP Algorithm, Cope Complicated Lights With Ease

Invariable quality in changeable lights



Product Parameters

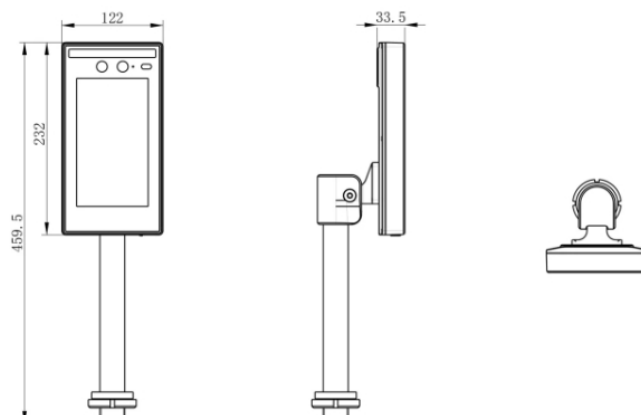

**General
Parameters**

Working temperature: -10°C~60°C

Power: DC 12V/2A (in different standards)

Working humidity: 10%~90%

Power consumption: Max. 15W

Storage temperature: -20°C~60°C

Protection grade: IP65, for outdoor use

Display

Display screen: 7-inch IPS touch screen

Resolution: 1024 * 600

**RGB
Camera**

Image sensor: 1/2.7" 2MP COMS HD WDR camera

CMOS: 1/2.7" 2MP CMOS HD WDR camera

Resolution: 1932 * 1092

Shutter type: Electronic rolling shutter

AGC balance: Auto

WDR: 120dB

FOV: 90°

AEC balance: Auto

AWB balance: Auto

Lens: f=4.3.5mm, Aperture F2.0

**Infrared
Camera**

Image sensor: 1/2.7" 2MP CMOS HD WDR camera

CMOS: 1/2.7" 2MP CMOS HD WDR camera

Resolution: 1932 * 1092

Shutter type: Electronic rolling shutter

AGC balance: Auto

Lens: f=3.5mm, Aperture F2.0

WDR :120dB

FOV: 90°

AEC balance: Auto

AWB balance: Auto

System Parameters

Operating system: Linux

Storage: 512M RAM, 8GB ROM

CPU: Dual-core ARM Cortex-A7@900MHz

Interfaces

RS232, RS485, Wiegand26/34 Output/Input, Relay Output, TTL Output, USB Type-A, Alarm Input, Exit Door Input, QR code access, Card reader

Communication Mode

RJ45, Wi-Fi, 4G (optional)

Functions

Accuracy: Up to 99.99%

Type of card reader : Standard EM&MIFARE card

Recognition distance configuration: Live detection: 0.3-1.5m; Non-live: 0.3-3m

Remote upgrade: Supports

Capacity : 50-thousand face database (Max. 100-thousand)

Records: 1 million pieces of recognition records

Custom UI: Supports

Software: Cloud, LAN